(12) UK Patent Application (19) GB (11) 2 308 264 (13) A

(43) Date of A Publication 18.06.1997

(21) Application No 9625687.0

(22) Date of Filing 11.12.1996

(30) Priority Data
(31) 95048431   (32) 11.12.1995   (33) KR

(71) Applicant(s)
Samsung Electronics Co Limited

(Incorporated in the Republic of Korea)

416 Maetan-dong, Paldai-gu, Suwon-City,
Kyunggi-do, Republic of Korea

(72) Inventor(s)
Dong-Yeol Kim

(74) Agent and/or Address for Service
Appleyard Lees
15 Clare Road, HALIFAX, West Yorkshire, HX1 2HY,
United Kingdom

(51) INT CL^6
H04N 5/783 5/781

(52) UK CL (Edition O)
H4F FD12M FD24 FD3P FD3T FKA

(56) Documents Cited
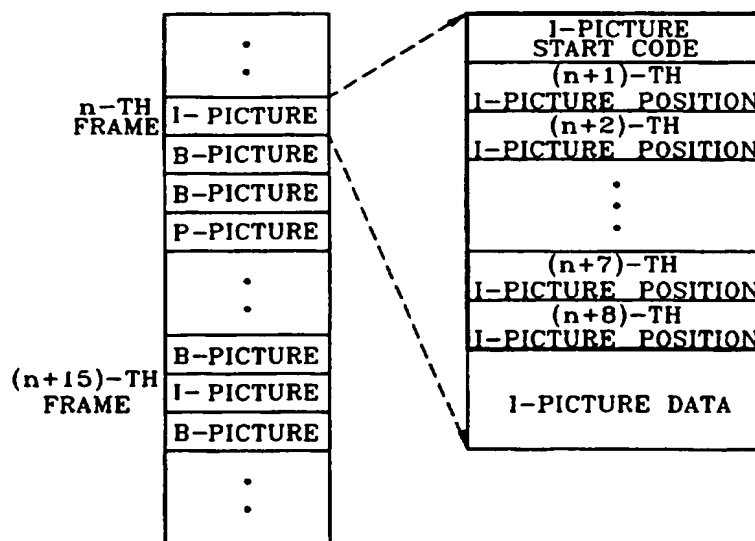None

(58) Field of Search
UK CL (Edition O) H4F FEHX FKA
INT CL^6 H04N 5/76 5/781 5/783 5/915 5/926
Online: WPI,INSPEC

(54) MPEG video disk recording system for high-speed reproduction

(57) A disk for high-speed reproduction contains position information of successive I-pictures in a recording area of a present I-picture. Using the above disk, a predetermined waiting time is set in a timer based on a selected multiple speed when moving image data is reproduced at high speed. Referring to the position information of the I-pictures read from the disk, a pickup is moved to the position of the following I-picture to then be reproduced. The data is reproduced at the moved position if the waiting time given by the timer is reached. A larger amount of image information is used within a given time according to each selected multiple speed in order to realize a high-speed reproduction operation with a more natural image displayed.

FIG. 4
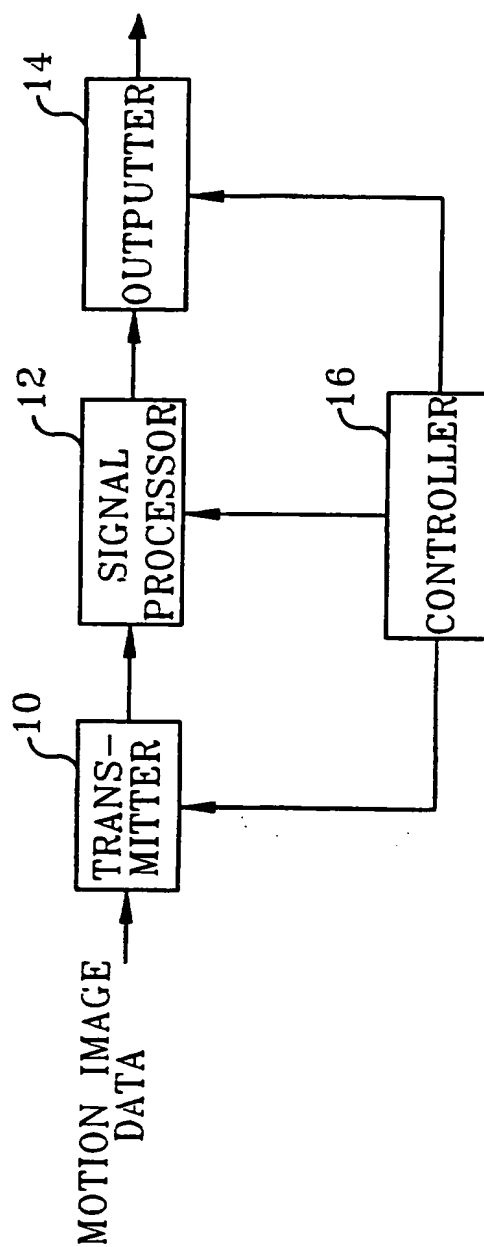

GB 2 308 264 A

FIG. 2(PRIOR ART)

MOTION IMAGE
DATA

TRANS-
MITTER
10

SIGNAL
PROCESSOR
12

OUTPUTTER
14

CONTROLLER
16

FIG. 4

I-PICTURE START CODE	(n+1)-TH I-PICTURE POSITION	(n+2)-TH I-PICTURE POSITION	· · ·	(n+7)-TH I-PICTURE POSITION	(n+8)-TH I-PICTURE POSITION	I-PICTURE DATA

· ·	I-PICTURE	B-PICTURE	B-PICTURE	P-PICTURE	· ·	B-PICTURE	I-PICTURE	B-PICTURE	· · ·

n-TH FRAME

(n+15)-TH FRAME

FIG. 6

```
         ┌─────────┐
         │  START  │
         └─────────┘
              │
              ▼                        ┌───────────────────┐
      ┌──────────────┐ ⌐200            │                   │
      │   REPRODUCE  │                 │                   │
      └──────────────┘                 │                   │
              │                        │                   │
              ▼                        │                   │
           ╱──────╲  ⌐210              │                   │
         ╱  IS A    ╲                  │                   │
        ╱ START CODE ╲     NO          │                   │
        ╲ OF I-PICTURE╱───────────────→│                   │
         ╲ DETECTED? ╱                 │                   │
           ╲──────╱                    │                   │
              │ YES       ⌐220         │                   │
              ▼                        │                   │
      ┌──────────────┐                 │                   │
      │STORE POSITION│                 │                   │
      │  DATA OF THE │                 │                   │
      │FOLLOWING I-PICTURES│           │                   │
      └──────────────┘                 │                   │
              │                        │                   │
              ▼                        │                   │
           ╱──────╲  ⌐230              │                   │
         ╱   IS     ╲                  │                   │
        ╱ HIGH-SPEED ╲    NO           │                   │
        ╲REPRODUCTION ╱────────────────┘
         ╲ KEY INPUT?╱
           ╲──────╱
              │ YES              ⌐240
    ┌──────────────┐  ▼
    │              │ ┌──────────────────────┐
    │   ⌐270       │ │SET A TIMER ACCORDING │
    │              │ │  TO THE NUMBER OF    │
┌───────────┐      │ │ THE MULTIPLE SPEED   │
│  OUTPUT   │←─────┤ │AND SET A POSITION OF │
│ I-PICTURE │      │ │THE FOLLOWING I-PICTURE│
└───────────┘      │ └──────────────────────┘
     ▲             │         │      ⌐250
     │             │         ▼
     │             │ ┌──────────────────┐
     │             │ │ WAIT FOR UNTIL   │
     │             │ │ A TIMER INTERRUPT│
     │             │ │SIGNAL IS GENERATED│
     │             │ └──────────────────┘
     │             │         │      ⌐260
     │             │         ▼
     │             │ ┌──────────────────┐
     │             │ │START TO REPRODUCE│
     │             │ └──────────────────┘
     │             │         │
     └─────────────┴─────────┘
```
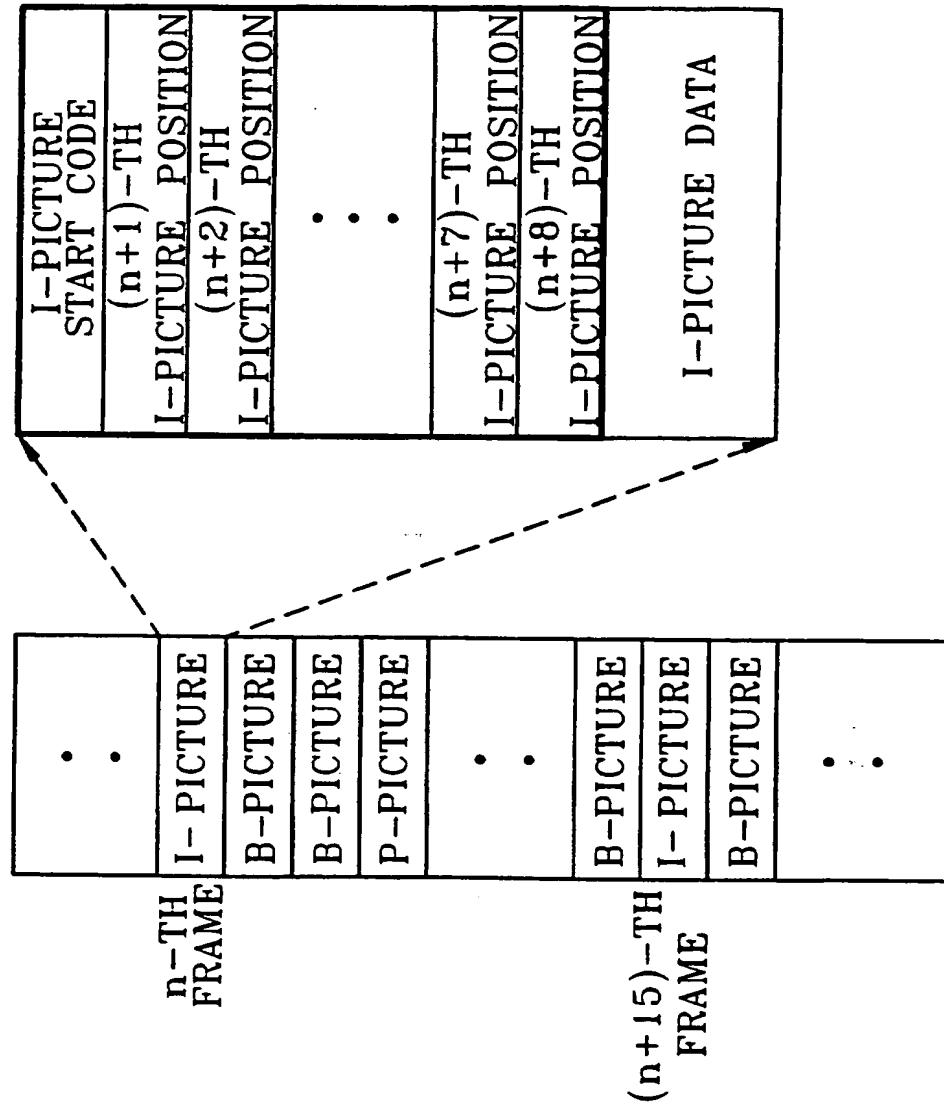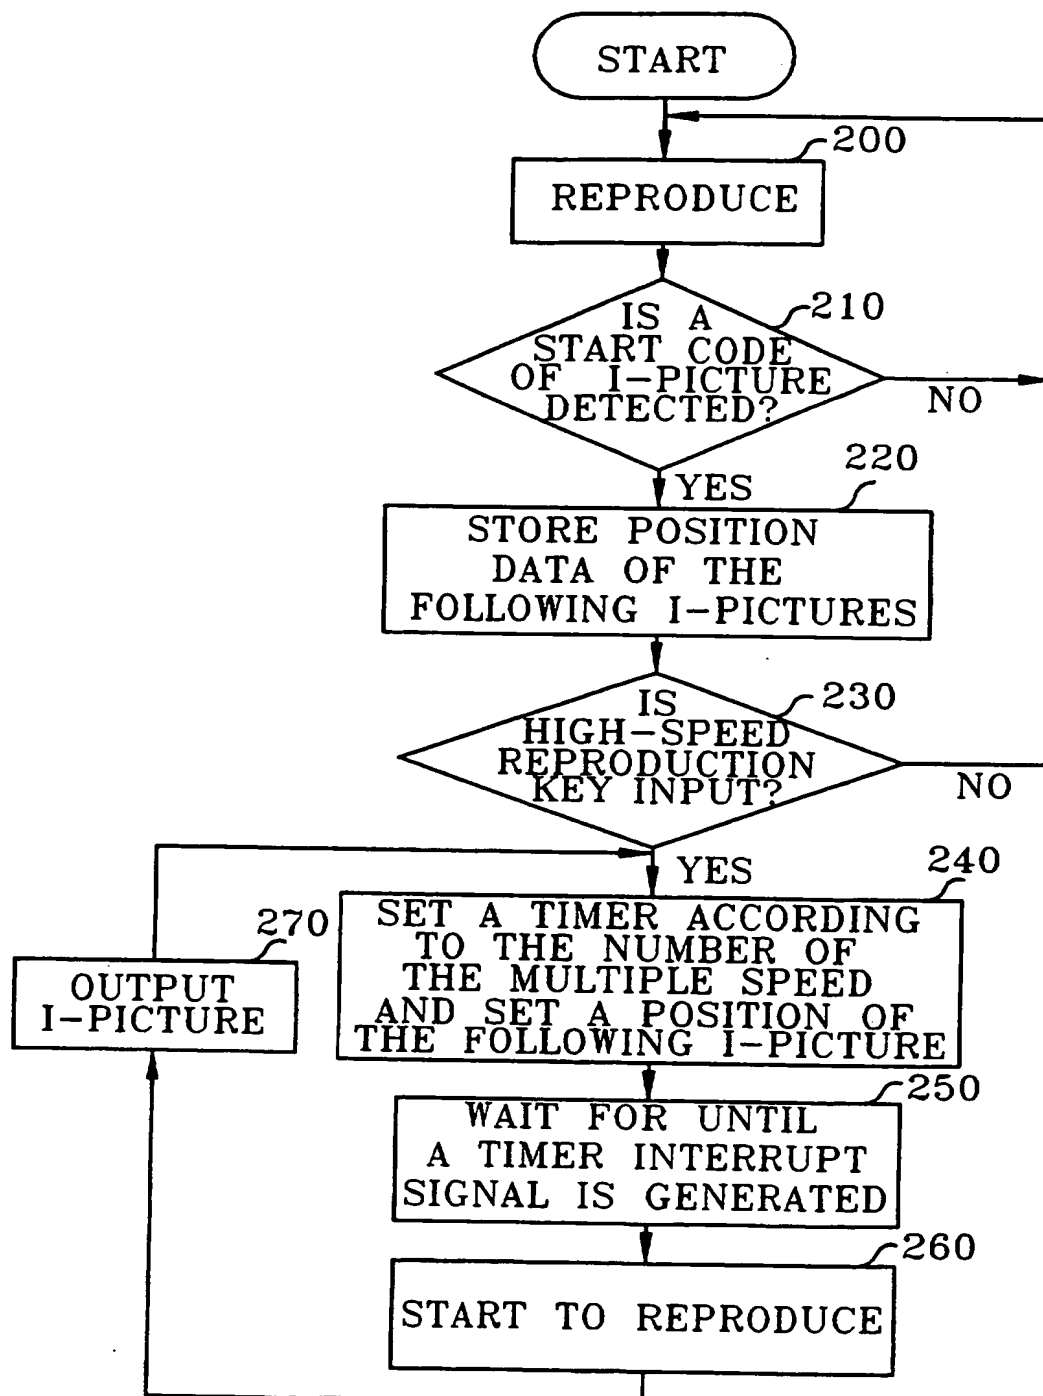
DISK SYSTEM FOR HIGH-SPEED REPRODUCTION AND HIGH-SPEED REPRODUCTION APPARATUS AND METHOD FOR MOTION IMAGE DATA USING THE SAME

5   The present invention relates to a recording and reproduction system for moving image data using a disk, and more particularly, to a disk format for high-speed reproduction and a high-speed reproduction apparatus and method for moving image data using the same.

10

According to the MPEG (Moving Pictures Experts Group) standard, one GOP (group of pictures) is composed of an I-picture (intra-coded picture), P-pictures (predicted-coded pictures) and B-pictures (bidirectional-coded pictures). Among them, the I-picture is coded using its own image information only. The P-picture is coded using a previous I-picture or P-picture, and the B-picture is coded using previous and following I-pictures or P-pictures. Both the P-picture and the B-picture are coded using motion prediction techniques. Even when a moving picture is reproduced, the I-picture is decoded using its own information only, whereas the P-picture or the B-picture is decoded using previously decoded pictures by the motion compensation technique. When each picture of one GOP layer according to the MPEG is coded and decoded, the relationship between neighbouring pictures is shown in Figure 1A.

Referring to Figure 1B showing the relationship between the decoding sequence and the display sequence for each picture, an I-picture is decoded in one GOP and then a P-picture is decoded with reference to the decoded I-picture, and a B-picture is decoded with reference to the I-picture and the P-picture. When the decoded pictures

speed reproduction key and the number of multiple speed for high-speed reproduction are input by a user (step 110). If it is judged that the high-speed reproduction key and the number of multiple speed have been input in step 110, the controller 16 determines a position to which a pickup (not shown) of the transmitter 10 will jump on the disk according to the number of multiple speed (step 120). For example, if the input number of multiple speed represents ten, the controller 16 performs a control operation in which the pickup of the transmitter 10 moves from a current position to a data recording position after 10 seconds. The transmitter 10 reads the data at the moved position and outputs the read data to the signal processor 12 (step 130). The signal processor 12 waits until the data read from the moved position, that is, the jumped position according to the 10 times speed, becomes an I-picture (step 140). If the I-picture is detected in step 140, the signal processor 12 restores the I-picture data and outputs the restored data to the outputter 14 (step 150). The outputter 14 outputs the restored data to a monitor (not shown). The controller 16 repetitively performs the procedures from step 120 to step 140 during high-speed reproduction mode.

Since such a conventional method jumps a disk position by a high-speed reproduction interval and repetitively performs a reproduction operation for a predetermined time from the position, I-pictures which exist on the disk are not read. Therefore, the faster the speed may be, the greater the number of the I-pictures are jumped.

As a result, the pictures displayed during the high-speed reproduction become more severely discontinuous as compared with pictures during normal reproduction, which

position information representing positions of a
predetermined number of successive I-pictures which are
recorded after the current I-picture on the disk, and the
I-picture data, are recorded; and

5

means for determining positions of the following I-
pictures to be used for high-speed reproduction using the
position information recorded on the disk, and reproducing
the I-picture data recorded on corresponding positions of
10 the disk according to the position information
representing the positions of the determined following I-
pictures, and repeating the determining and reproducing
operations.

15 Preferably, said means comprises a means for moving
to the positions of the following I-pictures to be
reproduced based on the positions of the following I-
pictures determined during the predetermined waiting time,
and reproducing the I-picture of the corresponding
20 position if the predetermined waiting time elapses.

Preferably, said means determines the positions of
the following I-pictures to be reproduced in response to
the selected multiple speed for high-speed reproduction.
25
Preferably, said means comprises:

a transmitter for reading data from said disk;

30 a signal processor for restoring data read from said
transmitter;

a memory for storing the position information of
successive I-pictures;
35

(b1) detecting the start code of the I-picture among the read data; and

(b2) reading and storing the position information of the
5   following I-pictures corresponding to the detected start code.

Preferably, said step (c) comprises the step of determining the positions of the following I-pictures for
10   high-speed reproduction among the position information stored in step (b), based on the selected multiple speed for high-speed reproduction.

Said step (c) preferably comprises the steps of:
15

(c1) setting a waiting time according to the selected multiple speed for high-speed reproduction;

(c2) determining the positions of the following I-pictures
20   to be used for high-speed reproduction based on the selected multiple speed; and

(c3) moving to the position of the following I-picture determined in step (c2) if the set waiting time is
25   reached.

Said step (c3) preferably comprises the step of reading and storing the position information of the following I-pictures at the moved position.
30

According to a third aspect of the invention there is provided a system for the reproduction of moving image data at a high-speed according to the MPEG standard, the system comprising:
35

The invention includes a system or method in accordance with the third or fourth aspects respectively, further comprising any one or more features from the accompanying description, claims, abstract or Figures, in any combination.

For a better understanding of the invention, and to show how embodiments of the same may be carried into effect, reference will now be made, by way of example, to the accompanying diagrammatic drawings, in which:

Figure 1A is a view for explaining the relationship between neighbouring pictures when each picture of one GOP layer according to the MPEG is coded and decoded;

Figure 1B shows the relationship between the decoding sequence and the display sequence for each picture in one GOP layer;

Figure 2 is a block diagram of a conventional high-speed reproduction apparatus for moving image data;

Figure 3 is a flow-chart diagram for explaining the operation of the Figure 2 apparatus;

Figure 4 is a view showing a disk format for high-speed reproduction according to an embodiment of the present invention;

Figure 5 is a block diagram of a high-speed reproduction apparatus for moving image data using a disk according to an embodiment of the present invention;

Figure 6 is a flow-chart diagram for explaining the operation of the Figure 5 apparatus; and

The operation of the Figure 5 apparatus having the above construction will be described below in more detail with reference to Figures 6 and 7.

5   If a reproduction key is input by a user, the controller 26 controls the Figure 5 apparatus to perform a reproduction operation (step 200). The transmitter 10 reads the data from the disk and outputs the read data to the signal processor 12. The signal processor 12 judges

10   whether the data input from the transmitter 10 contains the start code of the I-picture (step 210). If the I-picture start code is detected in step 210, the controller 26 reads position information of the following I-pictures contained in the following side of the I-picture start

15   code and stores the read position information in the memory 18 (step 220). Thereafter, the controller 26 judges whether the high-speed reproduction key is input (step 230). If the high-speed reproduction key is input, the controller 26 sets a predetermined waiting time to the

20   timer on the basis of the number of multiple speed input together with the high-speed reproduction key.

A table showing a set waiting time is shown in Figure 7. The horizontal axis in Figure 7 represents a select

25   period of a possible I-picture for high-speed reproduction, and the vertical axis therein represents the number of multiple speed. In the Figure 7, the table is made on the assumption that 50ms is required for a data processing time to access an initial one I-picture in the

30   transmitter 10, and 10ms is further required every time the number of jumped I-picture increases by one. The data processing time in the transmitter 10 is shown in parentheses on the horizontal axis of the table, whose unit is mili-seconds. Also, in the table, the figures in

35   the thicker solid boxes represent waiting times which can

restored (steps 260 and 270). The outputter 14 receives
the restored data from the signal processor 12 and outputs
the received data under control of the controller 26. The
controller 26 repetitively performs the procedures from
5   step 240 to step 270 during the high-speed reproduction
mode.

Since a general one GOP is composed of data having an
amount of 0.5 seconds (15 frames in case of the NTSC
10   system and 12.5 frames in case of the PAL system), the
interval between the I-pictures in which one I-picture
exists every one GOP becomes 0.5 seconds. In this case,
if the moving image data is reproduced at 10 times speed
using the conventional method, a total of 20 I-pictures
15   become lost for 10 seconds. However, since one I-picture
is reproduced every two I-pictures in the present
invention, only 10 I-pictures become lost for 10 seconds.
Also, since about one second is required for processing
data having an amount of 10 seconds even in the
20   reproduction time, an exact 10 times speed reproduction
can be realized.

As described above, embodiments of the present
invention use a larger amount of image information within
25   a given time according to a given multiple speed in order
to realize a high-speed reproduction operation so that a
more natural image can be displayed.

While only certain embodiments of the invention have
30   been specifically described herein, it will be apparent
that numerous modifications may be made thereto without
departing from the scope of the invention.

The reader's attention is directed to all papers and
35   documents which are filed concurrently with or previous to

CLAIMS

1.   A disk system for reproducing moving image data at high speed according to the MPEG standard, the disk system comprising:

5

a disk on which a start code representing a start of an I-picture on a recording area of the I-picture, position information representing positions of a predetermined number of successive I-pictures which are recorded after the current I-picture on the disk, and the I-picture data, are recorded; and

means for determining positions of the following I-pictures to be used for high-speed reproduction using the position information recorded on the disk, and reproducing the I-picture data recorded on corresponding positions of the disk according to the position information representing the positions of the determined following I-pictures, and repeating the determining and reproducing operations.

2.   The disk system according to claim 1, wherein said means comprises a means for moving to the positions of the following I-pictures to be reproduced based on the positions of the following I-pictures determined during the predetermined waiting time, and reproducing the I-picture of the corresponding position if the predetermined waiting time elapses.

3.   The disk system according to claim 1 or 2, wherein said means determines the positions of the following I-pictures to be reproduced in response to the selected multiple speed for high-speed reproduction.

(b)   detecting and storing the position information of the I-pictures among the data read in step (a), and reproducing the current I-picture data; and

5   (c) finding a recording area of the following I-picture to be used for high-speed reproduction using the position information stored in step (b).

6.   The high-speed reproduction method according to claim
10   5, wherein said step (b) comprises the steps of:

(b1) detecting the start code of the I-picture among the read data; and

15   (b2) reading and storing the position information of the following I-pictures corresponding to the detected start code.

7.   The high-speed reproduction method according to claim
20   5 or 6, wherein said step (c) comprises the step of determining the positions of the following I-pictures for high-speed reproduction among the position information stored in step (b), based on the selected multiple speed for high-speed reproduction.
25

8.   The high-speed reproduction method according to claim 5, 6 or 7, wherein said step (c) comprises the steps of:

(c1) setting a waiting time according to the selected
30   multiple speed for high-speed reproduction;

(c2) determining the positions of the following I-pictures to be used for high-speed reproduction based on the selected multiple speed; and
35

(ii) reproducing the current I-picture data;

(iii) determining a position of a subsequent I-picture data to be used for high-speed reproduction in accordance with said position information and a given selected multiple speed; and

(iv) moving to the position of said subsequent I-picture; and

(v) repeating said steps (i) to (iv).

12. A system according to claim 10 or a method according to claim 11, further comprising one or more features from the accompanying description, claims, abstract or drawings, in any combination.

13. A system substantially as herein described, with reference to Figures 4 to 7.

14. A high-speed reproduction method substantially as herein described with reference to Figures 4 to 7.